



Flashing installed



Flashing with Single Mount




Pegasus Solar's LightSpeed Mount flashing is the industry's first one piece elevated seal flashing. When used with LightSpeed Single and Double Mounts they deliver unparalleled water protection and are warranted for 20 years.

- One piece construction
- 0.7" elevated conical seal
- Tested to AC286 with/without sealant
- No sealing washers required
- Nest-able for compact storage

Mount and Flashing are secured with a single lag screw.

Use with Single and Double Mounts and Support Blocks.

Flashings are supplied in Single Mount Kits, Double Mount Kits and Support Blocks Kits.

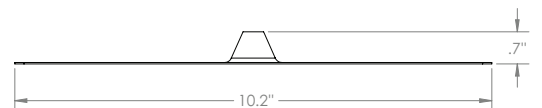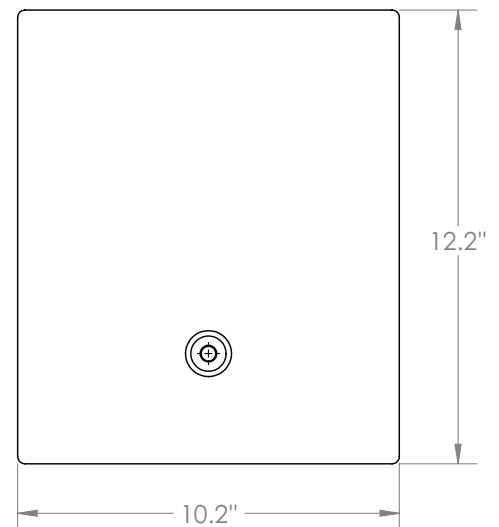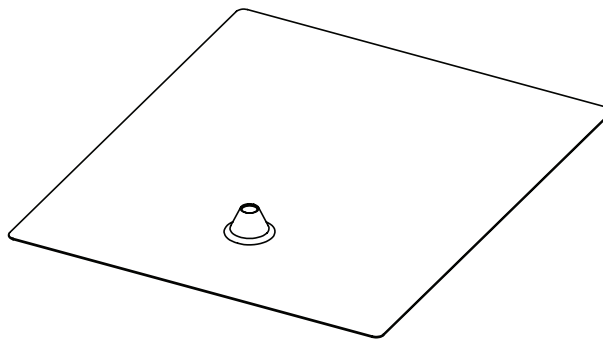

Specifications	Comp Flashing
Construction	One-Piece Formed Metal
Elevated Water Seal	Yes
Seal Height	0.7"
Sealing Washers	Not Required
Sealant	Recommended, Not Required
Material	Galvalume
Finish	Mill
Testing and Certifications	Tested to AC287 Without Sealant
Overall Dimensions	12.2" x 10.2" x 0.7"
Weight	1.1lbs/509gr

Patents Pending. All rights reserved.
© 2016 Pegasus Solar Inc.